

TBHF.7045 Series

Led recessed ground drive-over fixture. Die cast aluminium internal body, polycarbonate external body, 8 mm thickness tempered transparent glass, silicone gasket, main voltage 220-240V, 50/60 Hz. Manufactured in accordance with EN / IEC 60598-1.

MAIN FEATURES

-  Class I
-  CRI >80
-  EN / IEC 60598-1
-  Walkable
-  Mac Adams 3
-  RG0/RG1
-  Drive-over
-  IK 08
-  L90-B10 > 100.000 h
-  IP 67
- 
 - Stainless steel AISI 304
 - Matt grey
 - Matt black
 - Corten
-  100% regenerable




CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options
7045		R3		27 = 2700°K (CRI >80)		06		SL = on/off ○ Stainless steel AISI 304
		R6		30 = 3000°K (CRI >80)				GL = on/off ● Matt grey
		Q3		40 = 4000°K (CRI >80)				NL = on/off ● Matt black
		Q6						CL = on/off ● Corten

LUMEN



	°K	CRI	% Lm
27	2700	> 80	-7.64%
30	3000	> 80	-3.02%
40	4000	> 80	standard

STANDARD EQUIPMENT



TBHF.7045 Series

mod.R3

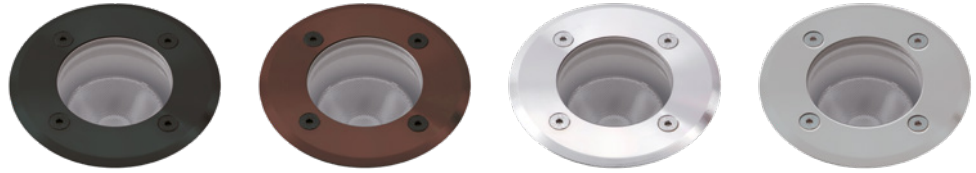


Optic

36° spot anti-glare lens in PMMA with high lux efficiency. Extra-clear glass diffuser.

DIMENSIONS

	A (mm)	B (mm)	C (mm)	Kg
D1	110	-	177	0,65





E.G. ARTICLE REFERENCE 3000K/4000K - CRI>80 - ON/OFF

PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R33006SL	6	3000K - CRI>80	640	107	D1	○
7045R34006SL	6	4000K - CRI>80	660	110	D1	○
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R33006GL	6	3000K - CRI>80	640	107	D1	●
7045R34006GL	6	4000K - CRI>80	660	110	D1	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R33006NL	6	3000K - CRI>80	640	107	D1	●
7045R34006NL	6	4000K - CRI>80	660	110	D1	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R33006CL	6	3000K - CRI>80	640	107	D1	●
7045R34006CL	6	4000K - CRI>80	660	110	D1	●

TBHF.7045 Series

mod.R6

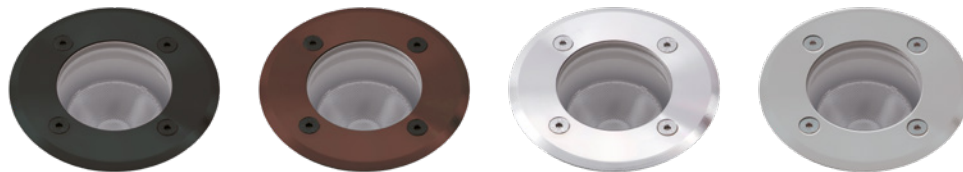


Optic

60° wide flood anti-glare lens in PMMA with high flux efficiency. Extra-clear glass diffuser.

DIMENSIONS

	A (mm)	B (mm)	C (mm)	Kg
D1	110	-	177	0,65




E.G. ARTICLE REFERENCE 3000K/4000K - CRI>80 - ON/OFF

PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R63006SL	6	3000K - CRI>80	648	108	D1	○
7045R64006SL	6	4000K - CRI>80	669	112	D1	○
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R63006GL	6	3000K - CRI>80	648	108	D1	●
7045R64006GL	6	4000K - CRI>80	669	112	D1	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R63006NL	6	3000K - CRI>80	648	108	D1	●
7045R64006NL	6	4000K - CRI>80	669	112	D1	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045R63006CL	6	3000K - CRI>80	648	108	D1	●
7045R64006CL	6	4000K - CRI>80	669	112	D1	●

TBHF.7045 Series

mod.Q3



Optic

36° spot anti-glare lens in PMMA with high lux efficiency. Extra-clear glass diffuser.

DIMENSIONS

	A (mm)	B (mm)	C (mm)	Kg
D2	110	110	177	0,65




E.G. ARTICLE REFERENCE 3000K/4000K - CRI>80 - ON/OFF

PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q33006SL	6	3000K - CRI>80	640	107	D2	○
7045Q34006SL	6	4000K - CRI>80	660	110	D2	○
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q33006GL	6	3000K - CRI>80	640	107	D2	●
7045Q34006GL	6	4000K - CRI>80	660	110	D2	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q33006NL	6	3000K - CRI>80	640	107	D2	●
7045Q34006NL	6	4000K - CRI>80	660	110	D2	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q33006CL	6	3000K - CRI>80	640	107	D2	●
7045Q34006CL	6	4000K - CRI>80	660	110	D2	●

INSTALLATION

Walkable recessed




Recessed ground installation.



TBHF.7045 Series

mod.Q6



Optic

60° wide flood anti-glare lens in PMMA with high flux efficiency. Extra-clear glass diffuser.

DIMENSIONS

	A (mm)	B (mm)	C (mm)	Kg
D2	110	110	177	0,65



E.G. ARTICLE REFERENCE 3000K/4000K - CRI>80 - ON/OFF

PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q63006SL	6	3000K - CRI>80	648	108	D2	○
7045Q64006SL	6	4000K - CRI>80	669	112	D2	○
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q63006GL	6	3000K - CRI>80	648	108	D2	●
7045Q64006GL	6	4000K - CRI>80	669	112	D2	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q63006NL	6	3000K - CRI>80	648	108	D2	●
7045Q64006NL	6	4000K - CRI>80	669	112	D2	●
Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7045Q63006CL	6	3000K - CRI>80	648	108	D2	●
7045Q64006CL	6	4000K - CRI>80	669	112	D2	●

ACCESSORIES



Polycarbonate spare formwork.