

> Datasheet 7054 Series

7054

Outdoor and indoor led fitting for wall installation. Die cast aluminium body painted with matt white, matt grey, anthracite or dark brown epoxypolyester powder. Electronic driver 220-240V 50/60Hz. Manufactured in accordance with EN / IEC 60598-1.

MAIN FEATURES

	Class II		CRI >80		EN / IEC 60598-1
	Wall		Mac Adams 3		RG0/RG1
	IK 08		L90-B10 > 100.000 h		
	IP 66				
	○ Matt white ○ Matt grey ● Anthracite ● Corten				
	100% regenerable				



CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options
7054		MA	27	= 2700°K (CRI >80)		09	BL	= on/off ○ Matt white
		B3	30	= 3000°K (CRI >80)		15	GL	= on/off ○ Matt grey
		BA	40	= 4000°K (CRI >80)		19	NL	= on/off ● Anthracite
						23	CL	= on/off ● Corten
						27		

Δ LUMEN

STANDARD EQUIPMENT

	°K	CRI	% Lm	
27	2700	> 80	-8.35%	- Inner electronic driver.
30	3000	> 80	-5.05%	
40	4000	> 80	standard	


mod.MA

Ottica

Ottica monoemissione concentrante, media o ampia. Carter antiriflesso in lamiera d'acciaio colore nero. Diffusore in vetro extra-chiaro.


Optic

Narrow beam, medium beam or wide beam single-emission optic. Black colored anti-reflection steel sheet carter. Extra-clear glass diffuser.

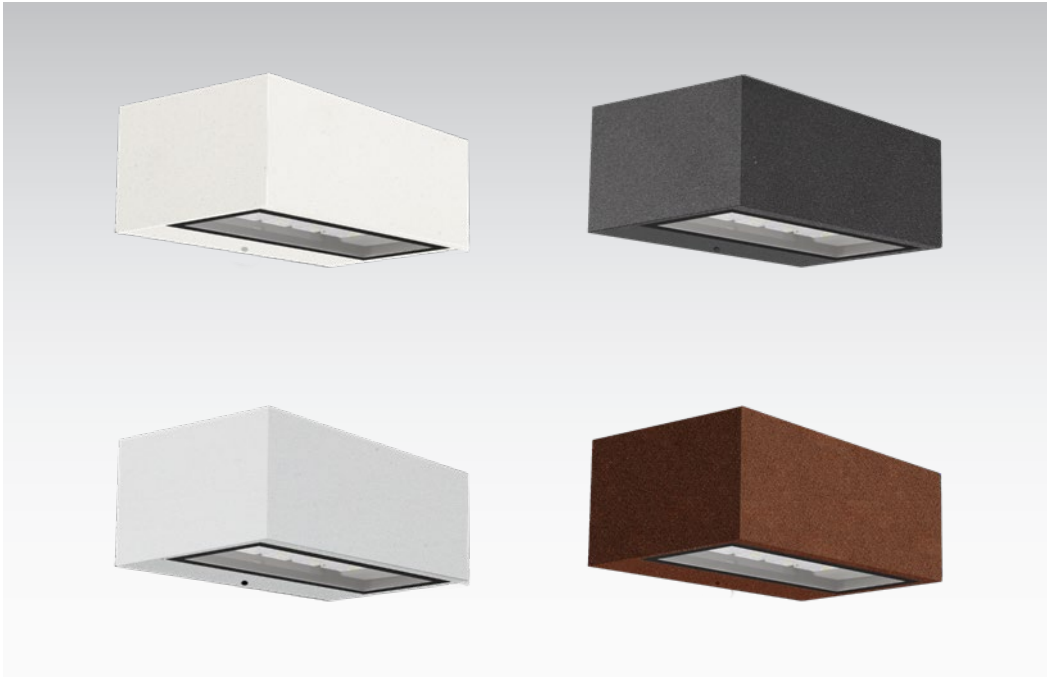

DIMENSIONI / DIMENSIONS

	A (mm)	B (mm)	C (mm)	Kg
D1	180	70	112	0,95




ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PRESTAZIONI / PERFORMANCE

Code	Mod.	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7054MA4009BL	MA	9	4000K - CRI>80	1238	138	D1	○
7054MA4015BL	MA	15	4000K - CRI>80	1812	121	D1	○
7054MA4019BL	MA	19	4000K - CRI>80	2220	117	D1	○
7054MA4023BL	MA	23	4000K - CRI>80	2611	114	D1	○



MA



CODIFICA COLORE / COLOR CODING

Color	Color	Color	Color
BL Bianco opaco Matt white	GL Grigio opaco Matt grey	NL Antracite Anthracite	CL Marrone scuro Dark brown


mod.B3
mod.BA

Optic

Ottica biemissione concentrante, media o ampia. Carter antiriflesso in lamiera d'acciaio colore nero. Diffusore in vetro extra-chiaro.

Optic

Narrow beam, medium beam or wide beam biemission optic. Black colored anti-reflection steel sheet carter. Extra-clear glass diffuser.

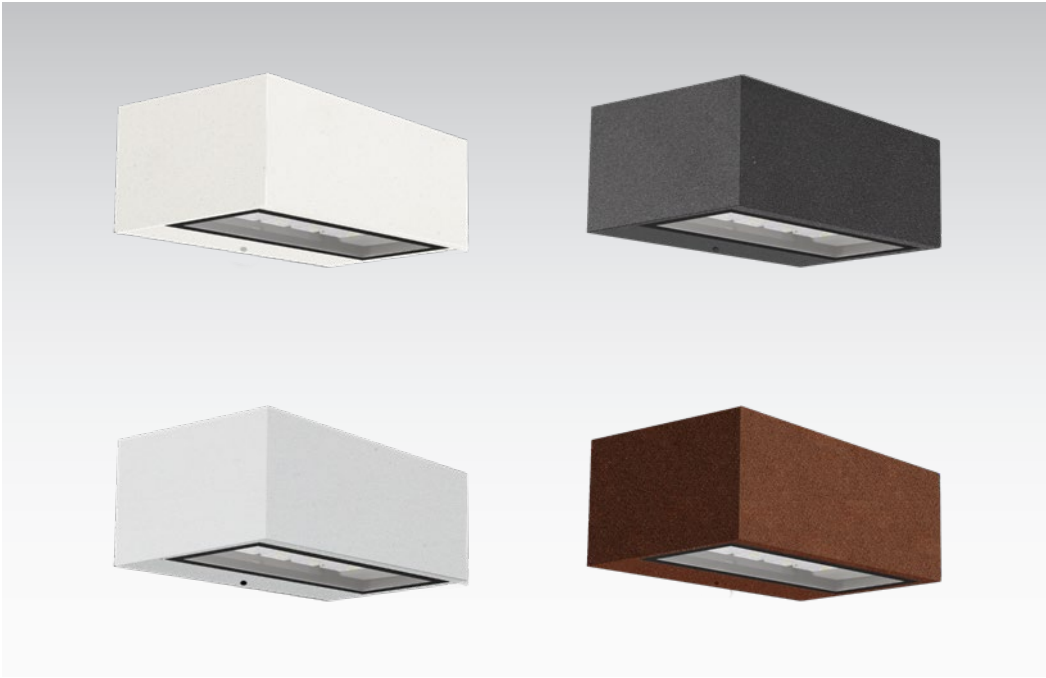

DIMENSIONI / DIMENSIONS


	A (mm)	B (mm)	C (mm)	Kg
D1	180	70	112	0,95

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PRESTAZIONI / PERFORMANCE

Code	Mod.	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7054B34009BL	B3	9	4000K - CRI>80	1334	148	D1	○
7054B34015BL	B3	15	4000K - CRI>80	1978	132	D1	○
7054B34019BL	B3	19	4000K - CRI>80	2607	137	D1	○
7054B34023BL	B3	23	4000K - CRI>80	2915	127	D1	○
7054B34027BL	B3	27	4000K - CRI>80	3369	125	D1	○

Code	Mod.	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7054BA4009BL	BA	9	4000K - CRI>80	1301	145	D1	○
7054BA4015BL	BA	15	4000K - CRI>80	1929	129	D1	○
7054BA4019BL	BA	19	4000K - CRI>80	2542	134	D1	○
7054BA4023BL	BA	23	4000K - CRI>80	2842	124	D1	○
7054BA4027BL	BA	27	4000K - CRI>80	3285	122	D1	○

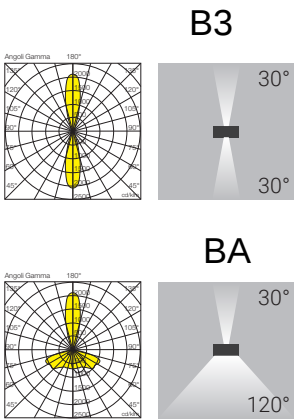

CODIFICA COLORE / COLOR CODING

Color	Color	Color	Color
BL Bianco opaco Matt white	GL Grigio opaco Matt grey	NL Antracite Anthracite	CL Marrone scuro Dark brown