


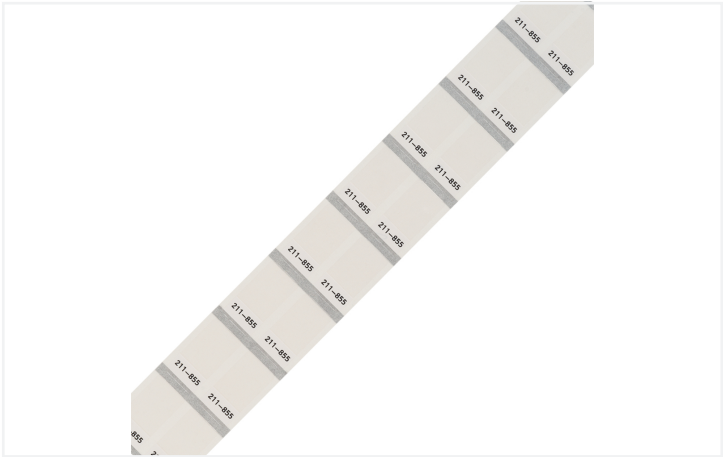

Color: white

Technical data	
Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	1,000 pcs/reel
Printing device	Smart Printer (thermal transfer printer)

Physical data	
Depth	0.12 mm
Marking surface	9 x 18 mm

Mechanical data	
Mounting type	Wrapping
Smear resistance	in conjunction with 258-5014 Ink Ribbon

Material data	
Color	white
Material	Polyvinyl chloride
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Acrylic; permanent
Halogen-free	Yes
Weight	129.6 g
Fire load	0 MJ



Environmental requirements	
Ambient temperature (storage)	+10 ... +22 °C
Ambient temperature (operation)	-30 ... +120 °C
Relative humidity	40 ... 50 %

Commercial data	
Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-04-01
eCl@ss 9.0	27-40-06-29
ETIM 9.0	EC001530
ETIM 8.0	EC001530
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821656852
Customs tariff number	39191080888

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 211-855	

Documentation

Operating Instructions			
211-856 Information on printing material	1 28.08.2020	pdf 1316.17 KB	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking device



Item No.: 258-5000
Thermal transfer printer; Smart Printer; for complete control cabinet marking; 300 dpi; With marking material

Installation Notes


Marking



Remove the printed label from the sheet or reel.



Wrap the label around the conductor or cable.



The transparent laminate protects the marking.