



Product image may not represent the final configuration stated above.



# PRODUCT SPECIFICATION VAN HOLOPHANE WEBSITE

Holophane Vantage LED luminaire with die-cast aluminium body housing and injection moulded high temperature acrylic prismatic lens. Supplied with a 3m flying lead. This specific SKU includes:

- Series 3
- LED light engine producing c.28,000 lm with a nominal 4000°K colour temperature, 80CRI
- Medium distribution
- Smooth White (RAL9016)
- DALI enabled (any on site controls wiring should be completed in compliance with the respective control system's installation instructions (and limitations). Holophane cannot be held responsible for the operation of its luminaires with third party control systems)
- 

## PERFORMANCE

<b>Drive Current from Driver:</b>	697mA
<b>Power:</b>	161.4W
<b>Fitting Current:</b>	0.72A
<b>Fitting Inrush:</b>	58A - 0.34ms
<b>Number of Drivers:</b>	1
<b>1x Driver 1 Inrush:</b>	58A - 0.34ms
<b>Max Drivers per 16A Type B MCB:</b>	7
<b>Max Fittings per 16A Type B MCB:</b>	7
<b>Total Number of LEDs:</b>	480
<b>Minimum Dim Level:</b>	10 %




20Kg





[Installation Guide](#)

# DIMENSIONS

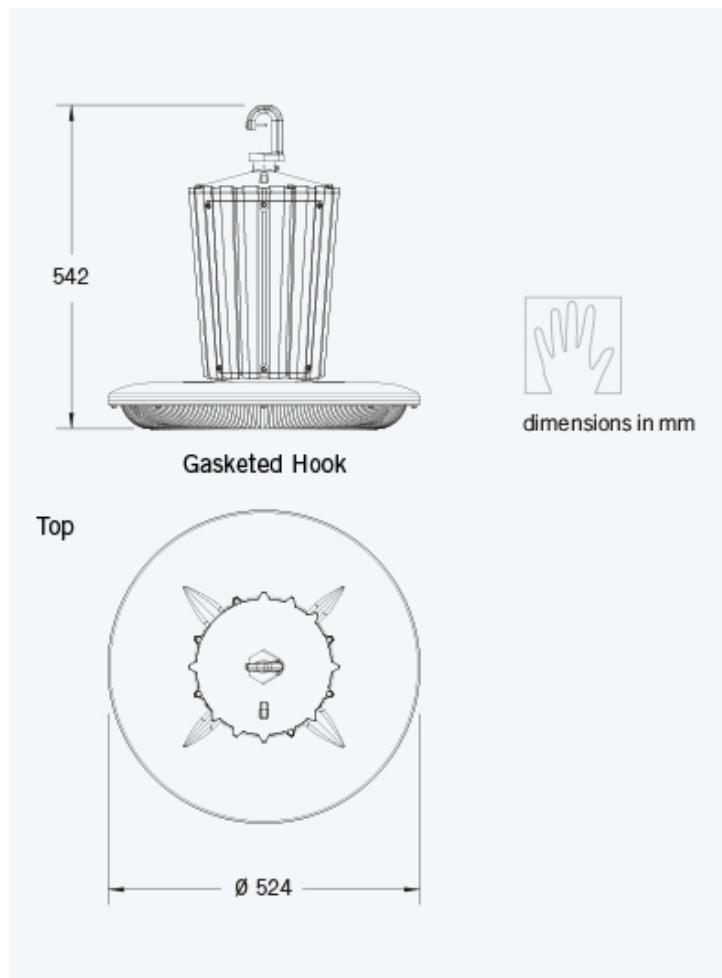


# PHOTOMETRY [↓ IES FILE](#)

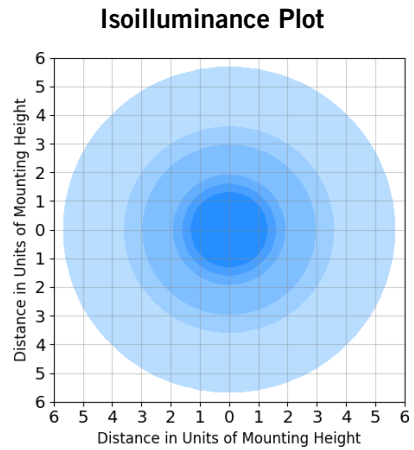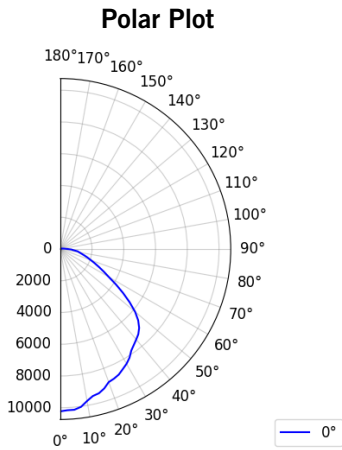

<b>Lumens:</b>	27,980
<b>CCT:</b>	4000K
<b>CRI:</b>	80
<b>IES File:</b>	VAN.3.LM2848.MD
<b>G-Class:</b>	G*3 Imax @ ≥ 70°: 73 Imax @ ≥ 80°: 43 Imax @ ≥ 90°: 16


## LLMF GRAPH

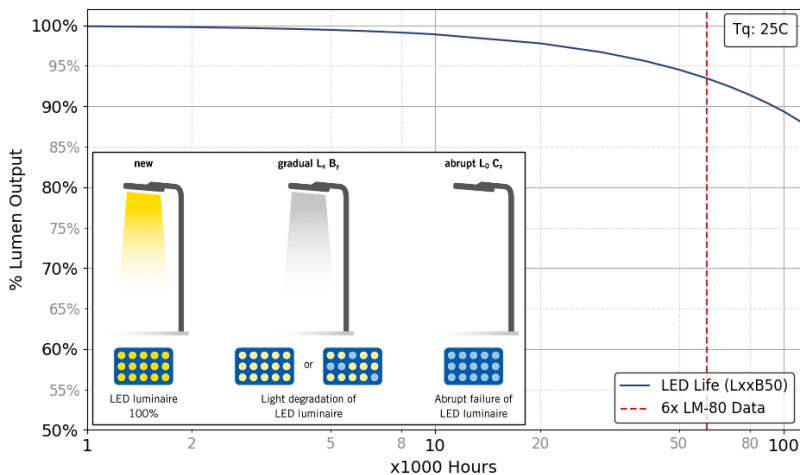


For reference purposes, the graph extrapolates beyond the recommend 6x LM-80 data in TM-21, which our calculations are based on.

# COLOURS

## Selected Colour

 **C1** Smooth White (RAL9016)

## Standard Colours Available

 **C1** Smooth White (RAL9016)

Lumen data is considered to be representative of the configuration shown, and may vary, with a tolerance on flux of +/- 7% (typical of LED manufacturer's data) and luminaire power of +/- 5%.

The specifications of the Holophane luminaires represents typical values. All descriptions, illustrations, drawings and specifications in the Holophane catalogue, Datasheets and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement.